

Option I

WiFi Configuration


Via App
(Smart Phone/Pad)

I Preparation


- 1.1 Power WiFi inverter (or EzLogger WiFi) on.
- 1.2 If you are configuring WiFi inverter, make sure the yellow led on front cover is flickering. Otherwise please set the communication to WiFi according to user manual of inverter at first.
- 1.3 Power WiFi router on.
- 1.4 Download 'SolarMan Tool' app from google play or apple app store and install it on smart phone or pad. Run it.

Note:
After Configuration, please browse <http://www.goodwe-power.com> to register and create your PV station


II Click 'Settings'

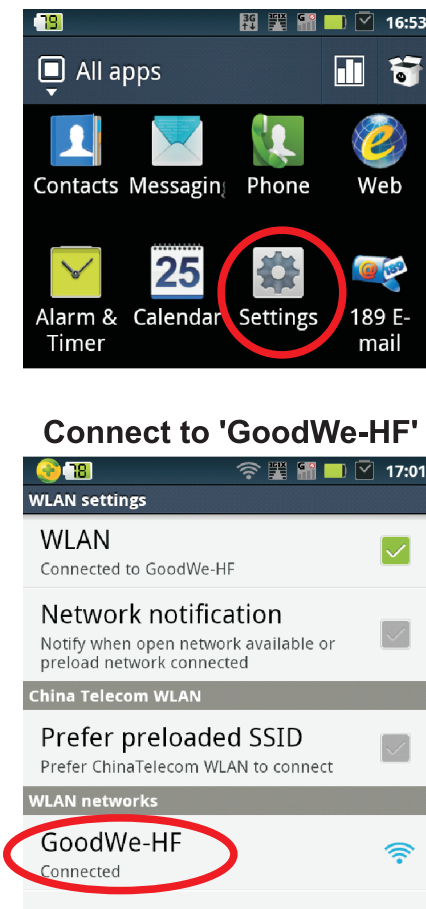


III Press 'Configure' Icon

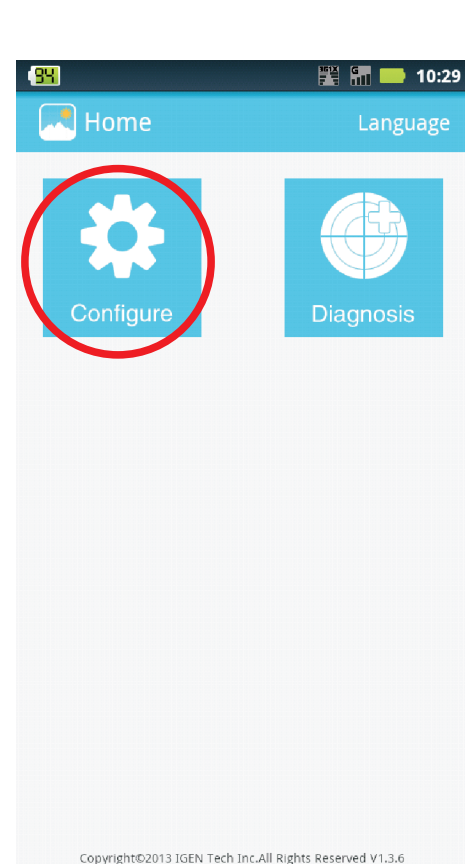


IV Choose 'Enter Manually'

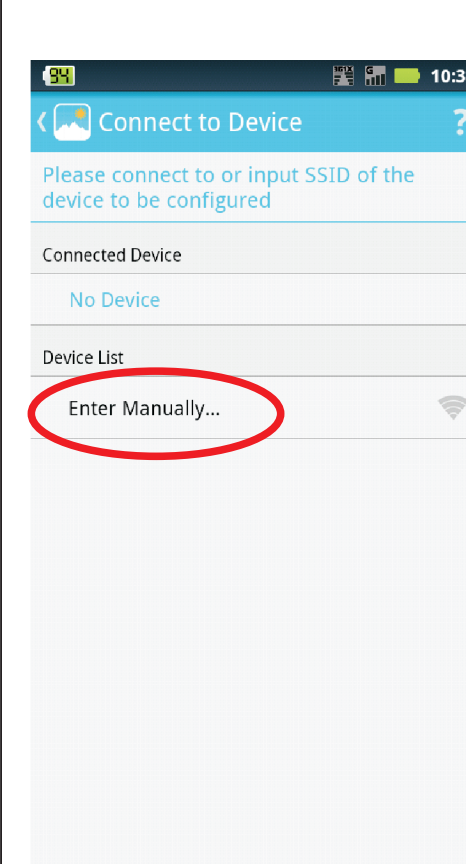


V Input 'GoodWe-HF' (No password needed)

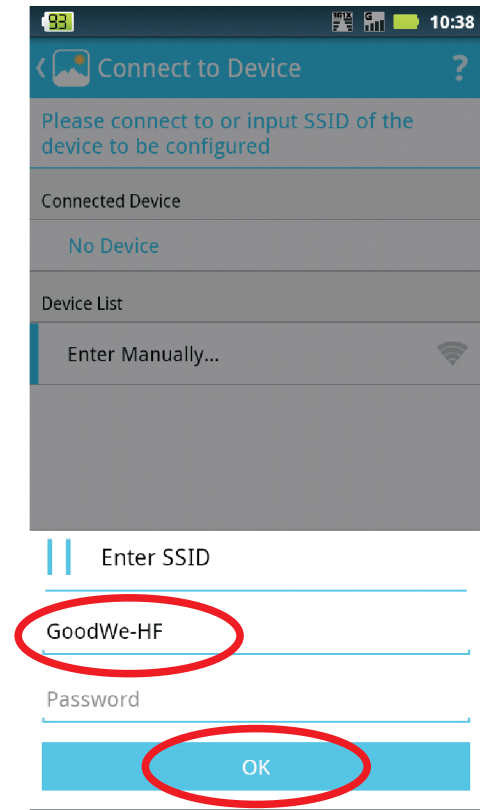


VI Press 'Next'

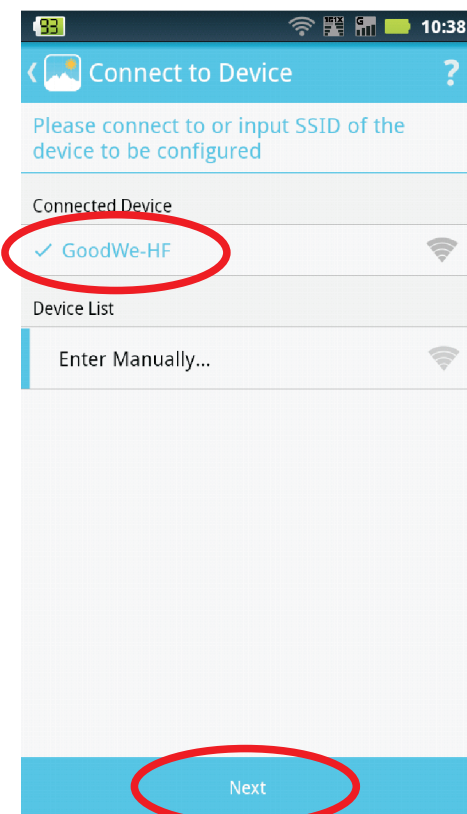


VII Choose WiFi Router Network and Input Password

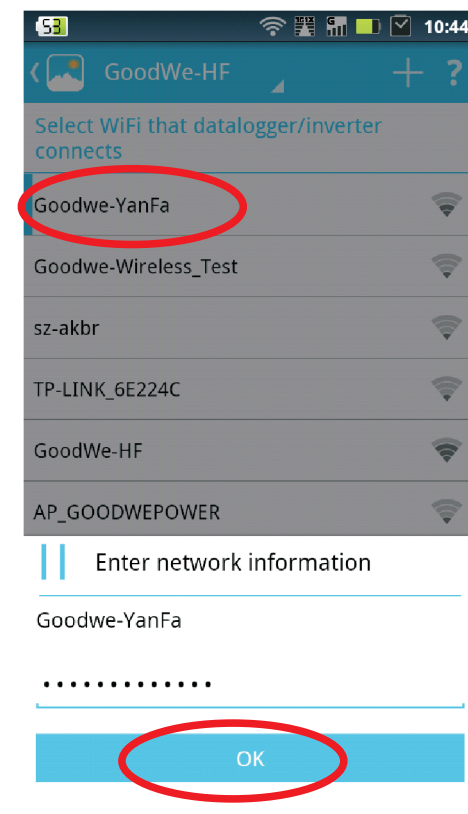


VIII Linking...

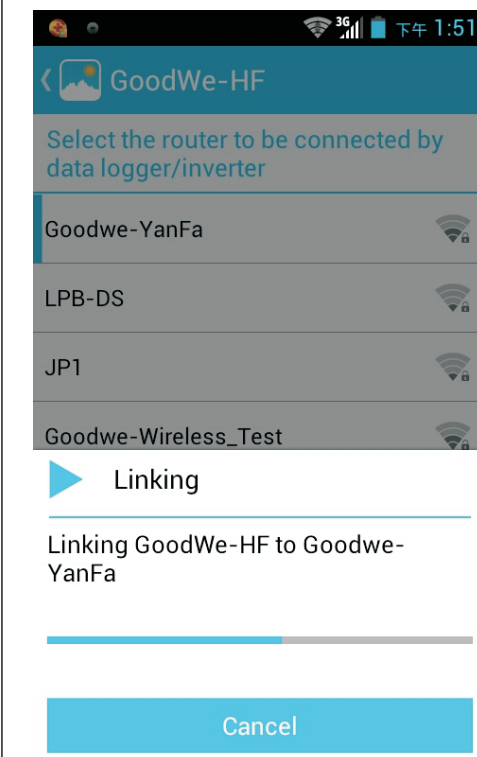


IX Repeat Step II, then Press 'Diagnose' to Check Result

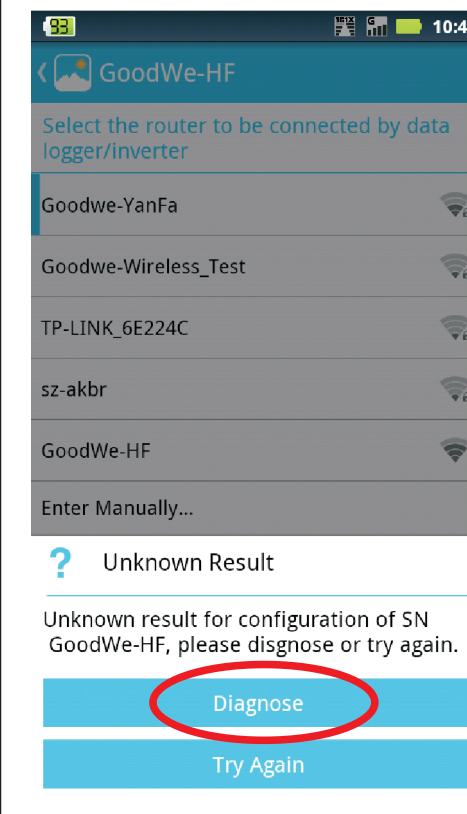

X Waiting for Result.

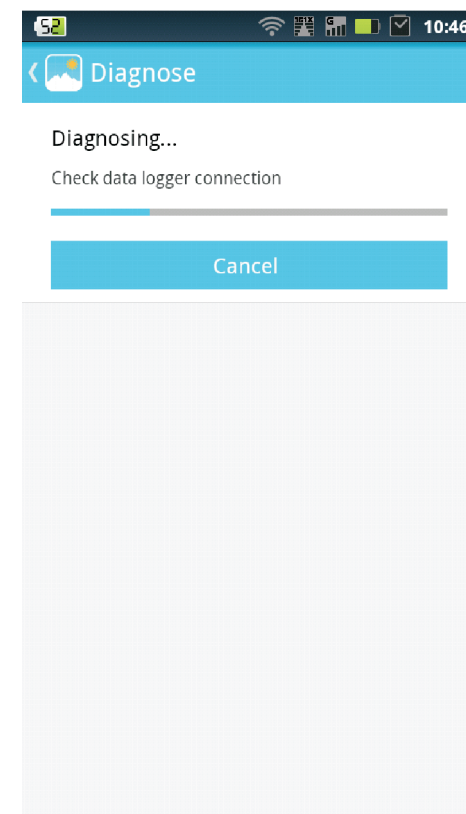

XI Completed or It Will Tell Where There Is Problem

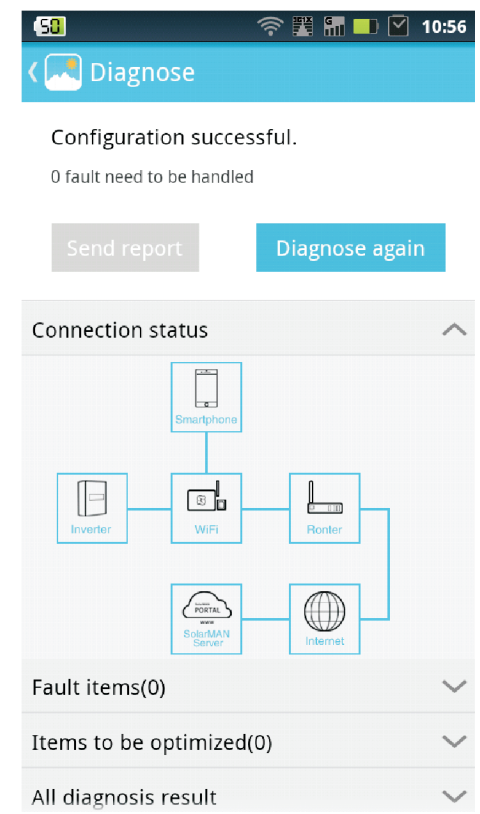

Option II

WiFi Configuration

Via Laptop

I


1. Preparation

- 1.1 Power WiFi inverter (or EzLogger WiFi) on.
- 1.2 If you are configuring WiFi inverter, make sure the yellow led on front cover is flickering. Otherwise please set the communication to WiFi according to user manual of inverter at first.
- 1.3 Power WiFi router on.
- 1.4 Switch on the WiFi of laptop.

II

2. Connect WiFi to 'GoodWe-HF'

- 2.1 Search WiFi network and connect "GoodWe-HF".
- 2.2 Browse website: <http://10.10.100.254>

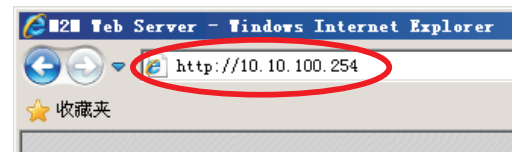


- 2.3 Enter User name:"admin", Password:"admin"



V


3.3 Change Password

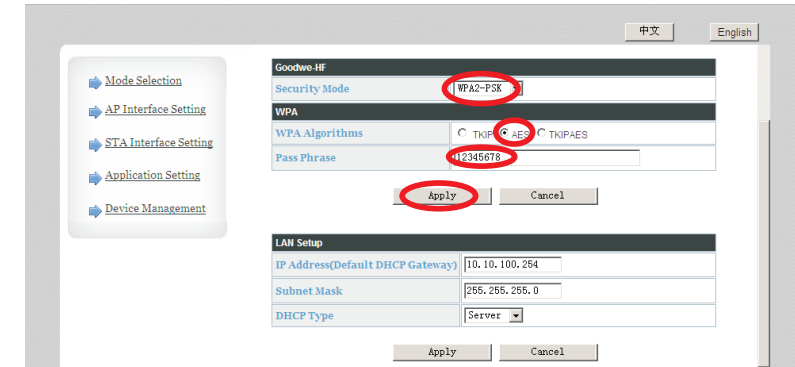

VI

4. Choose WiFi signal of your own router by "STA Interface Setting"


- 4.1 Click 'Search' button and choose your own WiFi connection point

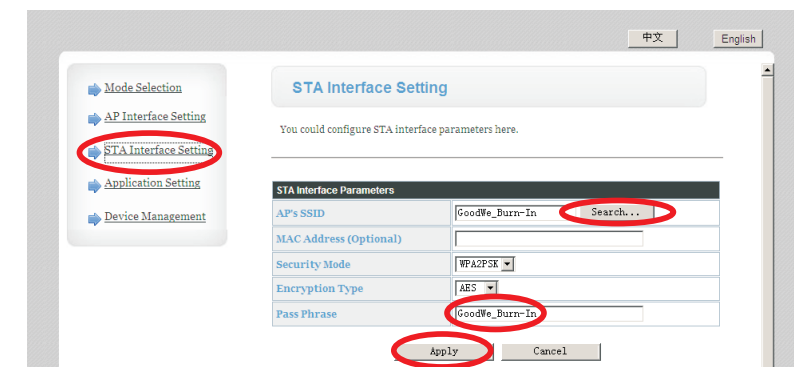

III


3. Configure security setting by "AP Interface Setting"

- 3.1 Change Network name

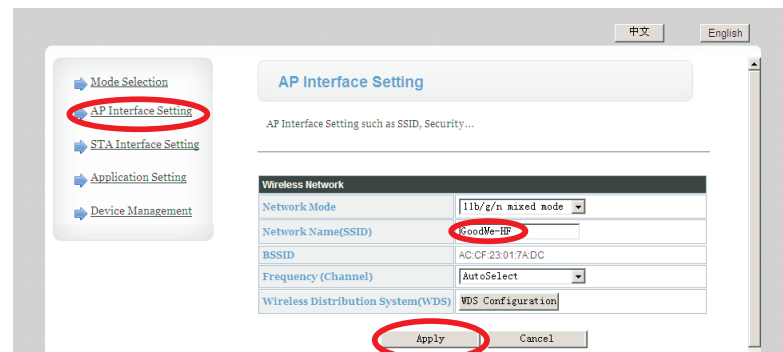

IV


- 3.2 Change Security Mode

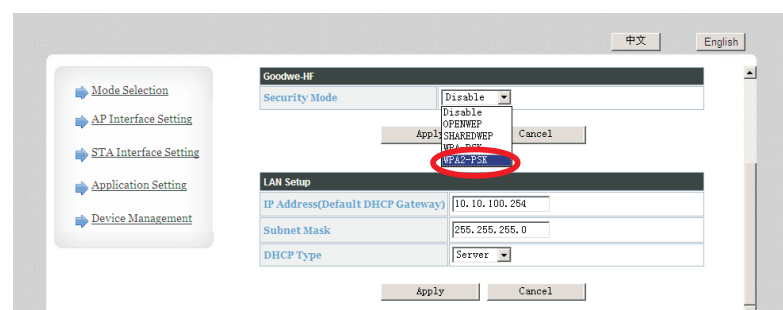

VII

5. Restart WiFi module by "Device Management"

- 5.1 Restart WiFi module

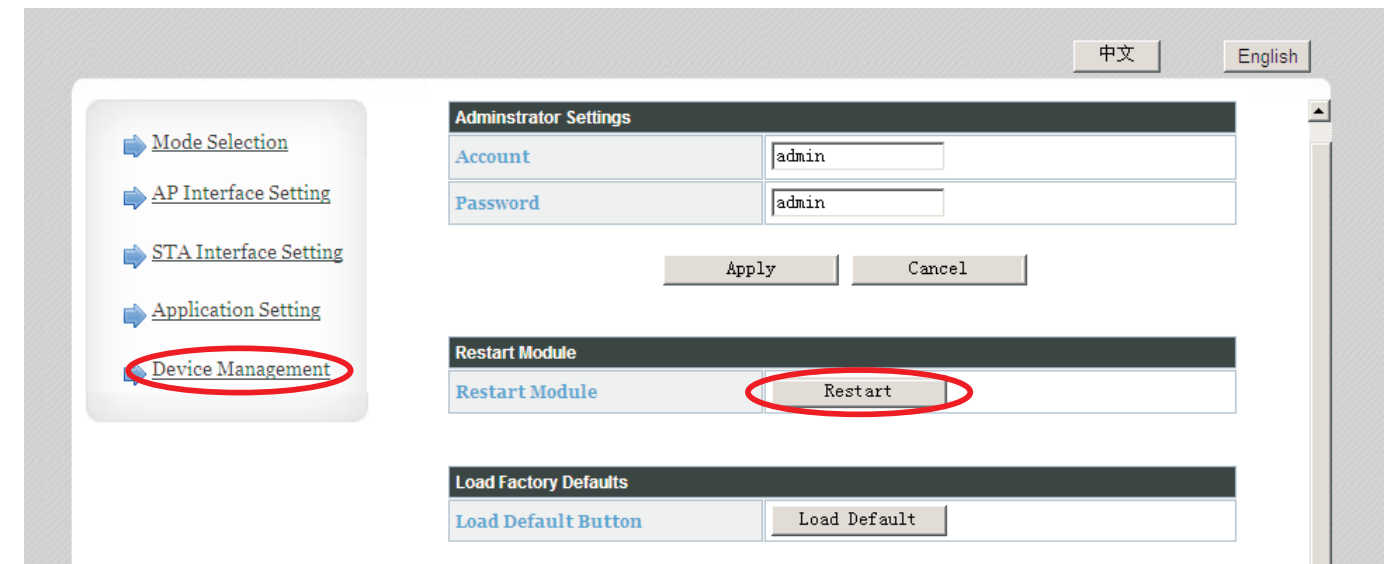

6. Reconnect laptop with local router, browse <http://www.goodwe-power.com> to register and create your PV station.